

AUTOMOBILE EXHAUST GAS ANALYZER

MODEL : ZKE23 : (CO/HC/CO₂)

ZKE24 : (CO/HC/CO₂/O₂)

ZKE22 : (CO/HC)



About 25 years have passed since Fuji Electric first marketed a CO/HC automobile exhaust gas analyzer. The high-level technology incorporated in these instruments has been highly evaluated by users nationwide. A new analyzer has now been developed in answer to demands for an even better instrument. This new analyzer is easier to handle by using user friendly human-machine interface. It can measure 6 parameters (CO, HC, CO₂, O₂, A/F and λ). CO, HC and CO₂ are measured by solid-state NDIR sensor. O₂ is measured by Galvanic sensor. This instrument completely fulfills the various requirements of an analyzer and is expected to fully satisfy users' expectations.


Features

- 4 components (CO, HC, CO₂ and O₂) can be measured and calculated A/F (Air/Fuel ratio) or λ (excess air ratio)
- A large LCD display with fluorescent back light displays 4 components, A/F and λ .
- A small size and high reliable solid-state NDIR sensor for CO, HC and CO₂ and Galvanic O₂ sensor provides a high level of accuracy, avoids the influence of vibration and shock.
- Display of sampling abnormality like as incorrect insertion of the probe and sampling line or membrane filter clogging.
- Compact design and lightweight (approx. 5kg).

Specification

TYPE	ZKE
Measurable components	CO+HC, CO+HC+CO ₂ or CO+HC+CO ₂ +O ₂
Measuring principle	CO, HC, CO ₂ ; NDIR O ₂ ; Galvanic Cell
Measuring range	CO, 0.00 ~ 10.00vol% HC ; 0 ~ 10000ppm or 0 ~ 14000ppm CO ₂ ; 0.00 ~ 20.00vol% O ₂ ; 0.00 ~ 25.00vol% (Option) A/F ; 10.0 ~ 30.0 ; 0.50 ~ 2.50
Display (minimum indication)	LCD display 4 digits and 5 digits CO (0.01vol%) HC (1ppm) CO ₂ (0.01vol%) O ₂ (0.01vol%) A/F (0.1) (0.01)
Repeatability	CO ; ± 0.06vol% or ± 5% of reading whichever is greater HC ; ± 12ppm or ± 5% of reading whichever is greater CO ₂ ; ± 0.5vol% or ± 5% of reading whichever is greater O ₂ ; ± 0.5vol% or ± 5% of reading whichever is greater
Response time	95% response less than 15sec (CO, HC & CO ₂) less than 25sec (O ₂)
Warm up time	5min.
Output	RS232C
Printer	Model BS-80tsd separately connected (separately ordered)
Electrical calibration	Auto calibration
Self diagnosis	Warming up time Improper insertion Clogging of filters and/or sampling line
Power supply	AC90 ~ 264V 50/60Hz
Ambient temperature	0 ~ 40
Ambient humidity	Less than 90%RH
Mass	Approx. 5kg
Outline dimension (H x W x D)	156 x 270 x 365mm

Outline (Unit : mm)

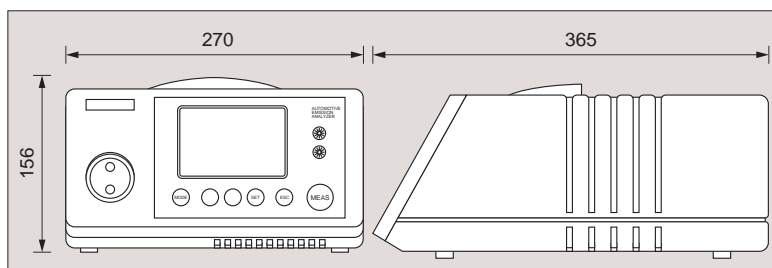

Ordering code for consumables

Name	Code	Remarks
Primary filter element	ZBNH3012	20pcs/1box
Membrane filter element	ZBNC6102	100pcs/1box
Packing for primary filter and drain separator	ZBNN2012	10pcs/1pack
O-rings for membrane filter	ZBNN3012	10pairs/1pack
Tube type fuse	ZBNM2012	10pcs/1pack 1A
Standard gas	ZBM4NVQ4-00	CO, CO ₂ , HC, N ₂

Symbol code

ZKE	2			1	1
					Letters
	2				Display:English
					Measurable components and measuring range
	3	1			CO:0 ~ 10% HC:0 ~ 10000ppm, CO ₂ :0 ~ 20%, A/F, indication
	3	3			CO:0 ~ 10% HC:0 ~ 14000ppm, CO ₂ :0 ~ 20%, A/F, indication
	4	2			CO:0 ~ 10% HC:0 ~ 10000ppm CO ₂ :0 ~ 20% O ₂ :0 ~ 25%, A/F, indication
	4	4			CO:0 ~ 10% HC:0 ~ 14000ppm CO ₂ :0 ~ 20% O ₂ :0 ~ 25%, A/F, indication
	2	5			CO:0 ~ 10% HC:0 ~ 10000ppm
	2	6			CO:0 ~ 10% HC:0 ~ 14000ppm

Fuji Electric Systems Co., Ltd.

Head Office
6-17, Sanbancho, Chiyoda-ku, Tokyo, 102-0075, Japan
<http://www.fesys.co.jp/eng>

Sales Div.
International Sales Dept.
No.1, Fuji-machi, Hino-city, Tokyo, 191-8502 Japan
Phone : 81-42-585-6201,6202
Fax : 81-42-585-6187
<http://www.fic-net.jp/eng>